


PFX *not just
a Color.*

PFX, the best choice for dry running applications.

Movex[®]
www.movexii.com

PFX

The best choice for dry running applications.

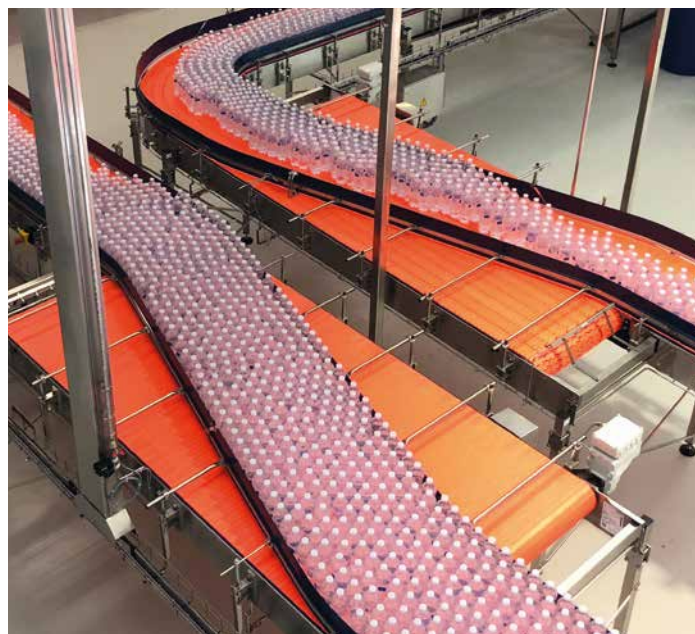

Movex® present an evolution in the materials with as a result the innovative material: **Movex's PFX!**

PFX is a plastic compound developed specific for chain and belts in order to run with limited lubrication or in dry applications where the demands are extreme concerning speed, performance & efficiency.

PFX is developed to reduce the friction between chain and product as well as chain and wearstrips even if no lubrication is used.

Also developed to avoid dusting under these extreme circumstances.

The consistent quality of this material assures a continuous low friction with a high strength resulting in a longer wear-life.

The value added properties of the new **PFX** material, contributes to a better control of total cost and sustainable conveyor technology and the fluorescent color give a high visibility to guarantee the best safety condition.

What are you waiting for? Contact us, and check the possibilities to use it!



Low friction

Developed to reduce friction between chain and product, and chain and wearstrip.



Minimal dusting

Developed to avoid dusting under extreme circumstances.



Food contact Certified

PFX material is suitable in food application.



High performance

Longer wear life lead to excellent and long enduring product handling features.



Control of cost


Better control of total cost and sustainable conveyor technology.



Patented material

PFX is an exclusive patent of Movex S.p.A. contact us for a free quotation.

Description and Features

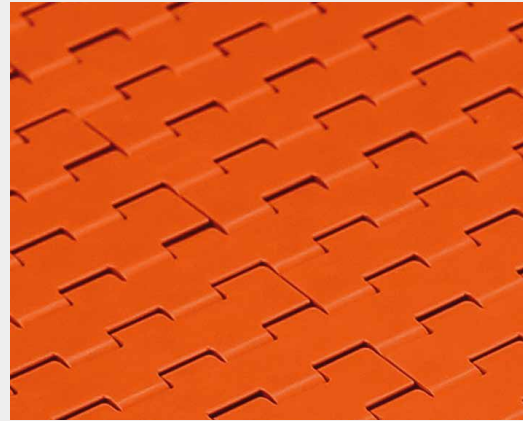

Description

Extra Performance material (PBT with additives)
with a very low coefficient of friction and improved wear resistance.
Recommended for high speed and dry running applications.

Colour: Fluorescent Orange

Primary Components: PBT


FDA Approval

Allowable application temperatures					
Fahrenheit			Celsius		
Min	Max		Min	Max	
	Dry	Wet		Dry	Wet
-40	248	140	-40	120	60

Note Material properties and performance of final product are subject to variation according to operating conditions, e.g. environmental conditions, chemicals, cleanliness.

Power saving

RELATIVE TO LF = 100%

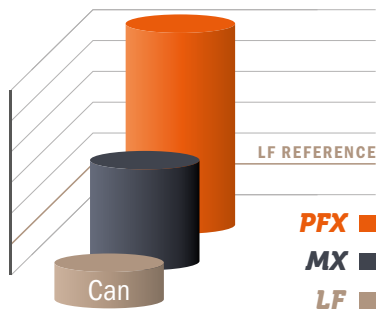


Example calculated with cans
UHMWPE chain guides
90° side-flexing conveyor
under accumulation

Friction


RELATIVE TO PFX = 100%

■ PFX ■ MX ■ LF

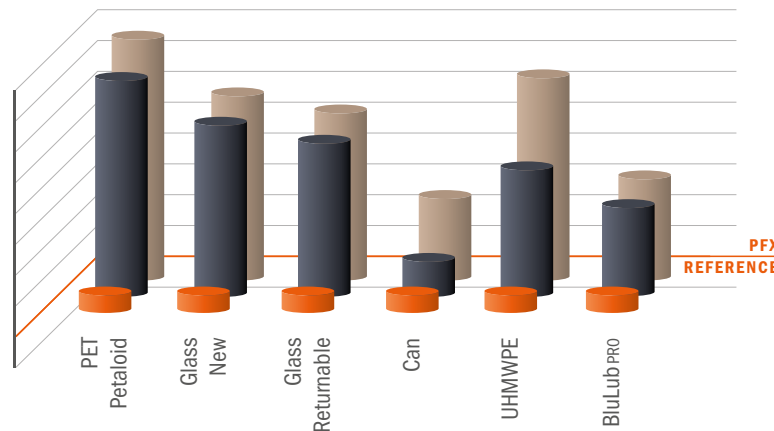

PV

RELATIVE TO PFX = 100%

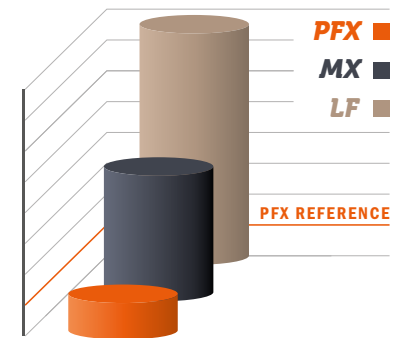

Movex®

Product range

820 FT

Article-Nr.	Plate Width mm	Weight kg/m	Max working load N
11013002	82,5	0,89	1260
11013003	83,8	0,90	
11013004	88,9	0,91	
11013014	101,6	0,95	
11013005	114,3	1,00	
11013006	152,4	1,22	
11013007	190,5	1,43	



828 FT

Article-Nr.	Plate Width mm	Weight kg/m	Max working load N
11023002	82,5	1,07	1860
11023003	83,8	1,13	



Backflex radius min.: 50 mm

880 M

Article-Nr.	Plate Width mm	Weight kg/m	Max working load N
11103002	82,5	1,05	1750
11103003	83,8	1,09	
11103005	114,3	1,15	



R: 457 mm

Backflex radius min.: 50 mm

880 TAB

Article-Nr.	Plate Width mm	Weight kg/m	Max working load N
11113002	82,5	1,015	1750
11113003	83,8	1,018	
11113005	114,3	1,09	



R: 457 mm

Backflex radius min.: 40 mm

260 M FT

Article-Nr.	Plate Width mm	Weight kg/m	Max working load N
11513003	83,8	1,65	1600
11513005	114,3	2,20	



Side flex radius: 500 mm

260 M FG

Article-Nr.	Plate Width mm	Weight kg/m	Max working load N
11543003	83,8	1,52	1600
11543005	114,3	2,03	



Side flex radius: 500 mm

Product range

260 TAB



Article-Nr.	Plate Width mm	Weight kg/m	Max working load N
11523003	83,8	1,75	1600
11523005	114,3	1,90	

Side flex radius: 500 mm

520 FT




CODE STRUCTURE

Series	Material	Width	Version
5201	30	See below	See below

Standard Width: from 0085 to 1530
(increments of 85 mm)

Version A - Standard | **Version B** - 1 Positioner
Version C - 2 Positioners

520 HD FT



CODE STRUCTURE

Series	Material	Width	Version
5211	30	See below	See below

Standard Width: from 0085 to 0680
(increments of 85 mm)

Version A - Standard | **Version B** - 1 Positioner
Version C - 2 Positioners

525 HD FT




CODE STRUCTURE

Series	Material	Width	Version
5261	30	See below	See below

Standard Width: from 0085 to 1530
(increments of 85 mm)

Version A - Standard | **Version B** - 1 Positioner
Version C - 2 Positioners

525 HD FG




CODE STRUCTURE

Series	Material	Width	Version
5262	30	See below	See below

Standard Width: from 0085 to 1530
(increments of 85 mm)

Version A - Standard | **Version B** - 1 Positioner
Version C - 2 Positioners

550 FT



CODE STRUCTURE

Series	Material	Width	Version
5221	30	See below	See below

Standard Width: from 0085 to 1530
(increments of 85 mm)

Version A - Standard | **Version B** - 1 Positioner
Version C - 2 Positioners


other different types of product in PFX are on request.

Movex[®]

Product range

550 FT One track belt

CODE STRUCTURE




Series	Material	Width	Version
5221	30	9330	See below

Standard Width: 9330

Version A - Standard | Version C - 2 Positioners

550 FG

CODE STRUCTURE



Series	Material	Width	Version
5222	30	See below	See below

Standard Width: from 0085 to 1530
(increments of 85 mm)

Version A - Standard | Version B - 1 Positioner
Version C - 2 Positioners

550 FG one track belt

CODE STRUCTURE




Series	Material	Width	Version
5222	30	9330	See below

Standard Width: 9330

Version A - Standard | Version C - 2 Positioners

550 PRO FT

CODE STRUCTURE




Series	Material	Width	Version
5227	30	9330	See below

Standard Width: 9330

Version A - Standard | Version C - 2 Positioners

550 PRO M

CODE STRUCTURE




Series	Material	Width	Version
5228	30	9330	See below

Standard Width: 9330

Version C - 2 Positioners

551 FT

CODE STRUCTURE




Series	Material	Width	Version
5231	30	See below	See below

Standard Width: from 0085 to 1530
(increments of 85 mm)

Version A - Standard | Version B - 1 Positioner
Version C - 2 Positioners

Product range

520 PRO LBP

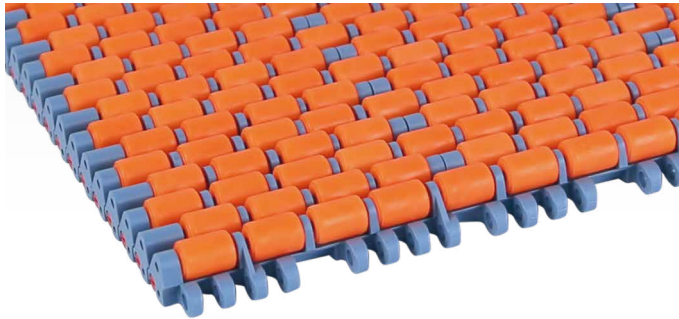


Belt Material

LFA
Low friction Acetal

Rollers Material

PFX
PBT with additives

551 PRO LBP

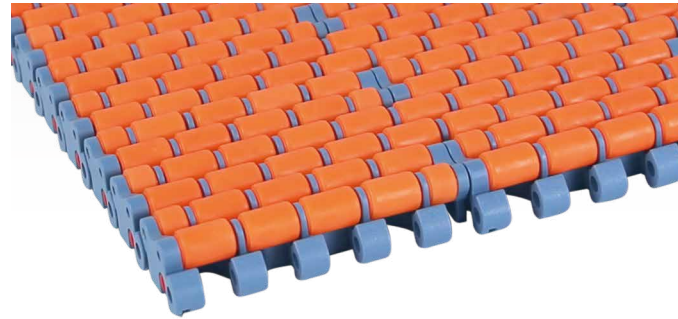

Belt Material

LFA
Low friction Acetal

Rollers Material

PFX
PBT with additives



Stainless steel Pin

Series	Material	Width	*Version
5209	01	0085	*
5209	01	0170	*
5209	01	0255	*
5209	01	0340	*
5209	01	0425	*
5209	01	0510	*
5209	01	0595	*
5209	01	0680	*



Plastic Pin

Series	Material	Width	Version
5210	01	0085	*
5210	01	0170	*
5210	01	0255	*
5210	01	0340	*
5210	01	0425	*
5210	01	0510	*
5210	01	0595	*
5210	01	0680	*



Stainless steel Pin

Series	Material	Width	Version
5239	01	0085	*
5239	01	0170	*
5239	01	0255	*
5239	01	0340	*
5239	01	0425	*
5239	01	0510	*
5239	01	0595	*
5239	01	0680	*



Plastic Pin

Series	Material	Width	Version
5240	01	0085	*
5240	01	0170	*
5240	01	0255	*
5240	01	0340	*
5240	01	0425	*
5240	01	0510	*
5240	01	0595	*
5240	01	0680	*

*Version

Standard Add A | With 1 Positioner Add B | With 2 Positioners Add C

*Version

Standard Add A | With 1 Positioner Add B | With 2 Positioners Add C

Movex[®]

www.movexii.com

Movex S.p.A.

Viale Industria, 22 - 24060 Castelli Calepio (BG) Italy

P +39 035 8359711 | F +39 035 4420873

info@movexii.com

Follow us   

Movex around the world

Movex AG India

+91-120-4159660-62

Movex France

+33-0640592049

Movex Nederland

+31-630-994850

Movex UK Ltd.

+44-77-20678442

Movex Brasil Ltda

+55-15-3141-2550

Movex GmbH

+49-6204-9375-0

Movex SA de CV

+52-1-3318458187

Movex USA Inc.

+1-919-274-5477